

A47H-¹⁶/₂₅/₄₀C型 带扳手弹簧微启式安全阀 Spring low lift safety valve with spanner

● 用途:


本阀门适用于工作温度在≤350℃的蒸汽、空气等介质的设备或管路上，作为超压保护装置。

● Use:

This safety valve is used for the equipment and pipelines with such media as steam and air at a working temperature less than 350°C. It serves as an overpressure protection device.

● 主要连接尺寸 Main Connection Dimensions

公称通径 DN	Nominal Diameter	do	DN'	L	L ₁	≈H
20	15	20	100	85	298	
25	20	25	100	85	298	
32	25	32	115	100	310	
40	32	40	120	110	315	
50	40	50	135	120	377	
65	50	65	140	130	415	
80	65	80	160	135	420	
100	80	100	170	160	539	
125	100	125	190	190	624	
150	125	150	205	195	636	
200	150	200	240	230	772	
250	200	250	350	320	970	

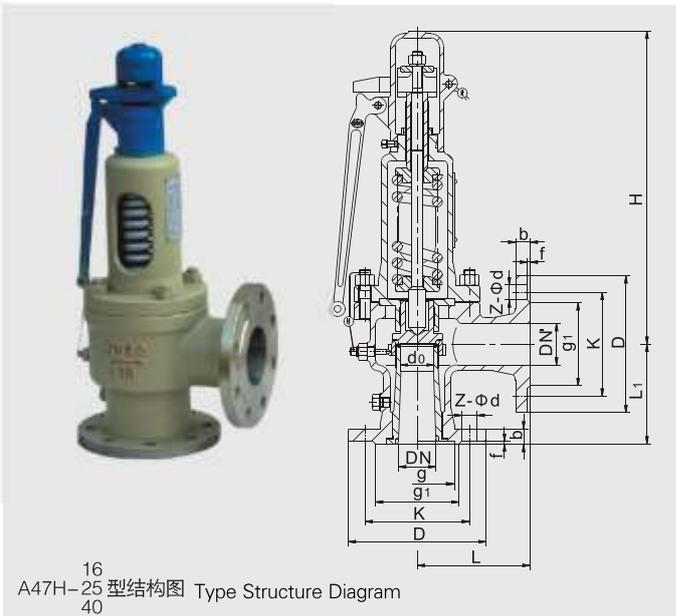

A47Y-⁶⁴/₁₀₀C型 带扳手弹簧微启式安全阀 Spring low lift safety valve with spanner

● 用途:


本阀门适用于工作温度在≤350℃的蒸汽、空气等介质的设备或管路上，作为超压保护装置。

● Use:

This safety valve is used for the equipment and pipelines with such media as steam and air at a working temperature less than 350°C. It serves as an overpressure protection device.

● 主要连接尺寸 Main Connection Dimensions

公称通径 DN	Nominal Diameter	do	DN'	L	L ₁	≈H
20	15	20	100	95	301	
25	20	25	100	95	301	
32	25	32	115	105	312	
40	32	40	135	115	366	
50	40	50	160	130	401	
65	50	65	175	160	570	
80	65	80	175	160	565	
100	80	100	190	180	597	
150	100	150	280	260	738	

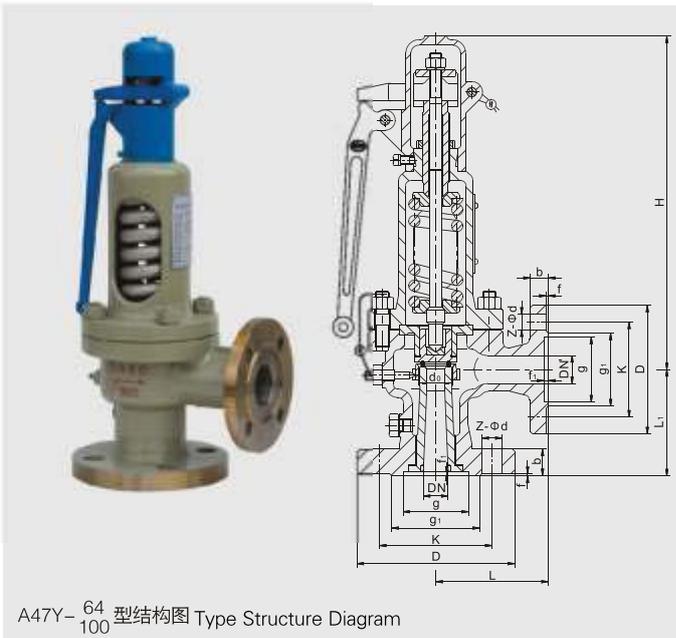

A48Y-¹⁶/₂₅/₄₀ C型 带扳手弹簧全启式安全阀 Spring fall lift safety valve with spanner

● 用途:


A48Y型适用于工作温度在≤350℃的蒸汽、空气等介质的设备或管路上，作为超压保护装置。

● Use:

A48Y type are used for the equipment and pipelines with such media as steam and air at a working temperature less than 350°C. It functions as an overpressure protection device.

● 主要连接尺寸 Main Connection Dimensions

公称通径 DN	Nominal Diameter	do	DN'	L	L ₁	≈H
20	20	15	25	110	95	306
25	25	16	32	110	95	306
32	32	20	40	115	100	309
40	40	25	50	120	110	323
50	50	32	65	135	120	333
65	65	40	80	160	140	420
80	80	50	100	170	135	432
100	100	65	125	205	160	553
125	125	80	150	210	190	639
150	150	100	175	255	230	654
200	200	125	250	305	260	797
250	250	150	300	350	320	998
300	300	200	400	370	350	1246
350	350	250	500	375	415	1494
400	400	280	500	395	415	1780

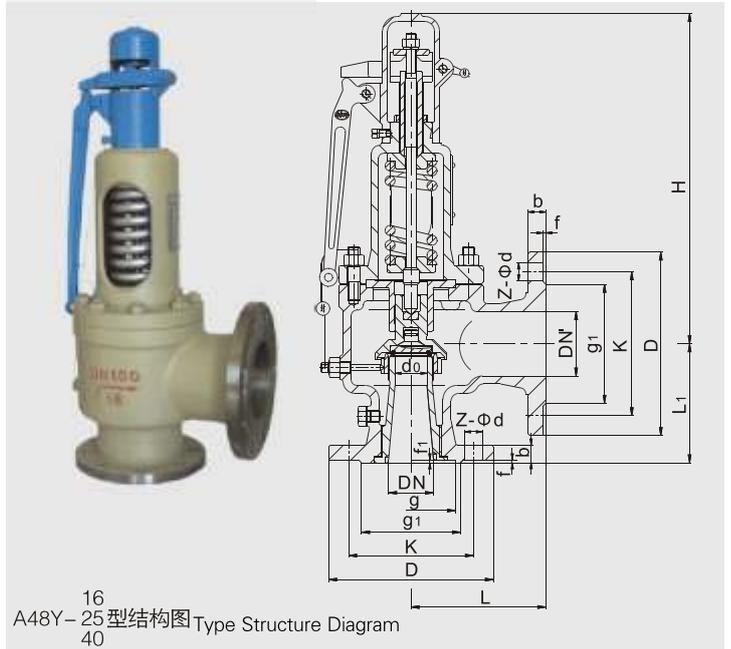

A48Y-⁶⁴/₁₀₀ C型 带扳手弹簧全启式安全阀 Spring fall lift safety valve with spanner

● 用途:

A48Y型适用于工作温度在≤350℃的蒸汽、空气等介质的设备或管路上，作为超压保护装置。

● Use:

A48Y type are used for the equipment and pipelines with such media as steam and air at a working temperature less than 350°C. It functions as an overpressure protection device.

● 主要连接尺寸 Main Connection Dimensions

型号 Type	公称通径 DN	Nominal Diameter	do	DN'	L	L ₁	≈H
A48Y-64C	20	20	12	25	110	100	305
	25	25	16	32	110	100	305
	32	32	20	40	130	110	318
	40	40	25	50	135	120	323
	50	50	32	65	160	130	415
	65	65	40	80	175	160	531
A48Y-100C	80	80	50	100	175	160	541
	100	100	65	125	195	195	624
	150	150	100	200	285	260	903
	20	20	12	25	110	100	305
	25	25	16	32	110	100	305
	32	32	20	40	130	110	318
A48Y-100C	40	40	25	50	135	120	323
	50	50	32	65	160	130	415
	65	65	40	80	175	160	531
	80	80	50	100	175	160	541
	100	100	65	125	195	195	624
	150	150	100	200	285	260	903

